



Fraunhofer Institut
Techno- und
Wirtschaftsmathematik

K. Dreßler, M. Speckert, R. Müller, Ch. Weber

Customer loads correlation in truck engineering

© Fraunhofer-Institut für Techno- und Wirtschaftsmathematik ITWM 2009

ISSN 1434-9973

Bericht 151 (2009)

Alle Rechte vorbehalten. Ohne ausdrückliche schriftliche Genehmigung des Herausgebers ist es nicht gestattet, das Buch oder Teile daraus in irgendeiner Form durch Fotokopie, Mikrofilm oder andere Verfahren zu reproduzieren oder in eine für Maschinen, insbesondere Datenverarbeitungsanlagen, verwendbare Sprache zu übertragen. Dasselbe gilt für das Recht der öffentlichen Wiedergabe.

Warennamen werden ohne Gewährleistung der freien Verwendbarkeit benutzt.

Die Veröffentlichungen in der Berichtsreihe des Fraunhofer ITWM können bezogen werden über:

Fraunhofer-Institut für Techno- und
Wirtschaftsmathematik ITWM
Fraunhofer-Platz 1

67663 Kaiserslautern
Germany

Telefon: 06 31/3 16 00-0
Telefax: 06 31/3 16 00-10 99
E-Mail: info@itwm.fraunhofer.de
Internet: www.itwm.fraunhofer.de

Vorwort

Das Tätigkeitsfeld des Fraunhofer-Instituts für Techno- und Wirtschaftsmathematik ITWM umfasst anwendungsnahe Grundlagenforschung, angewandte Forschung sowie Beratung und kundenspezifische Lösungen auf allen Gebieten, die für Techno- und Wirtschaftsmathematik bedeutsam sind.

In der Reihe »Berichte des Fraunhofer ITWM« soll die Arbeit des Instituts kontinuierlich einer interessierten Öffentlichkeit in Industrie, Wirtschaft und Wissenschaft vorgestellt werden. Durch die enge Verzahnung mit dem Fachbereich Mathematik der Universität Kaiserslautern sowie durch zahlreiche Kooperationen mit internationalen Institutionen und Hochschulen in den Bereichen Ausbildung und Forschung ist ein großes Potenzial für Forschungsberichte vorhanden. In die Berichtreihe sollen sowohl hervorragende Diplom- und Projektarbeiten und Dissertationen als auch Forschungsberichte der Institutsmitarbeiter und Institutsgäste zu aktuellen Fragen der Techno- und Wirtschaftsmathematik aufgenommen werden.

Darüber hinaus bietet die Reihe ein Forum für die Berichterstattung über die zahlreichen Kooperationsprojekte des Instituts mit Partnern aus Industrie und Wirtschaft.

Berichterstattung heißt hier Dokumentation des Transfers aktueller Ergebnisse aus mathematischer Forschungs- und Entwicklungsarbeit in industrielle Anwendungen und Softwareprodukte – und umgekehrt, denn Probleme der Praxis generieren neue interessante mathematische Fragestellungen.

A handwritten signature in black ink, appearing to read 'Dieter Prätzels-Wolters' with a stylized flourish at the end.

Prof. Dr. Dieter Prätzels-Wolters
Institutsleiter

Kaiserslautern, im Juni 2001

CUSTOMER LOADS CORRELATION IN TRUCK ENGINEERING

¹Dressler, Klaus*, ¹Speckert, Michael, ²Müller, Roland, ²Weber, Christof

¹Fraunhofer Institut Techno- und Wirtschaftsmathematik, Germany,

²Daimler AG Stuttgart, Germany

KEYWORDS – Customer distribution, safety critical components, quantile estimation, Monte-Carlo methods

ABSTRACT

Safety and reliability requirements on the one side and short development cycles, low costs and lightweight design on the other side are two competing aspects of truck engineering. For safety critical components essentially no failures can be tolerated within the target mileage of a truck. For other components the goals are to stay below certain predefined failure rates. Reducing weight or cost of structures often also reduces strength and reliability. The requirements on the strength, however, strongly depend on the loads in actual customer usage. Without sufficient knowledge of these loads one needs large safety factors, limiting possible weight or cost reduction potentials.

There are a lot of different quantities influencing the loads acting on the vehicle in actual usage. These ‘influencing quantities’ are, for example, the road quality, the driver, traffic conditions, the mission (long haulage, distribution or construction site), and the geographic region. Thus there is a need for statistical methods to model the load distribution with all its variability, which in turn can be used for the derivation of testing specifications.

This paper describes new methods for the derivation of customer-correlated loads from field measurements. Simply taking the worst case ever measured as target load for testing is not sufficient. Instead assumptions on the distribution of the most important influence quantities are applied to derive the distribution of the loads acting on various spots on the truck (wheel forces, cabin accelerations etc.). Depending on the data, this process might involve parametric distribution estimation as well as Monte-Carlo methods for the simulation of customer loading. The result of this step is a certain percentile (e.g. a 95% customer) for the load acting on each component. In a second step this percentile is mapped to proving ground test scenarios corresponding to the derived customer loading profile. Based on this schedule testing is both customer-correlated (because of the derivation process) and accelerated (because of the special design of the test tracks). Component loads for further testing on servo-hydraulic rigs can also be derived from these test track schedules.

1 INTRODUCTION TO THE LOAD DERIVATION PROCESS

At the beginning of a durability developing process of heavy duty trucks, a target loading level has to be defined, by which the development objectives can be evaluated at any time. This defined target loading level usually accompanies the whole developing process from the first definition of the component load over the dimensioning of the component within the CAE-process to the final release of a component within a test. It is especially important that a consistent load spectrum is available for all development partners (e.g. designers, computation

department, testing department) so that the target achievement is comparable during all development steps.

In the case of vehicle testing, the load spectrum is typically defined by Rough-Road-Testing. In the past, the characteristics and the damage intensity of Rough-Road-Testing have often been derived from correlations between executed tests and observed events in the field. Due to various disadvantages of this method new processes are executed to try to adapt the loading level more directly to the loads in the field already before starting the development process of a new vehicle generation. A means for this is the execution of load measurements of preceding generations in the field. On the basis of these measurements, a so-called Reference-Customer-Spectrum is formed that should contain all relevant loads of partially very different customer operations.

Before execution of the load measurements in the field, the special requirements for the derivation of a relevant loading level are to be considered, e.g.:

- Selection of a representative vehicle type to cover the variety of versions
- Selection of suitable evaluation factors (e.g. measurement channels) for loads
- Consideration of customer expectations from the product
- Consideration of representative customer operations and conditions
- Documentation of influencing parameters to subsequently optimise the product life according to different conditions (e.g. customer expectations, market conditions etc.)

To be able to form a representative Reference-Customer-Spectrum such that customer expectations are met, the use of a data interpretation process based on statistics is of advantage. This process will be explained further in the following chapters.

After a representative spectrum has been formed, there is a need to test the spectrum within an accelerated test procedure. For this purpose, test drives on Rough-Roads are usually executed with a high acceleration factor regarding the test mileage but also with an equivalent damage ratio compared to the customer operations. Therefore, each truck manufacturer uses corresponding Rough-Roads on proving grounds by means of which the loading level can be tested. Depending on the quality of the Rough-Roads and the intensity of the demanded shortening of time, the Reference-Customer-Spectrum and the Target-Load-Spectrum comply with each other more or less.

For the vehicle development of Mercedes-Benz, a series of newly developed Rough-Roads to test heavy duty and upper medium duty trucks are available in the new proving ground in Würth since the middle of 2007. Due to corresponding combination possibilities of the roads, a good approach of the Target-Load-Spectrum to the Reference-Customer-Spectrum is possible. Meanwhile, this has been confirmed successfully by first tests.

2 INTRODUCTION TO THE TECHNICAL SETTINGS

In finite life design of vehicle components it is assumed, that the component may fail after a certain amount of usage. Usually a failure means a small detectable crack, which might lead to a complete breakdown of the component if used further on.

As a simple example consider the tank mount at the frame of a tractor. Besides the fuel weight the loading depends on many more factors like the road type and quality, the driving conditions, or the total weight of the truck. These factors are governed by some underlying factors like the regional restrictions and properties (market), the mission type (long haulage, distribution or construction site) or the specific customer.

As a measure for the loading of the tank mount we may use the local strain $\varepsilon(t)$ measured with a suitably applied strain gauge. We further assume that we can derive the force signal $S(t)$ from the strain signal using CAE-models of the component.

In that example, we have the typical situation (high cycle fatigue), that the component is able to withstand the load for a short while without any problems, but many repetitions during the life of the truck might lead to failures. The time to failure depends on the number and size of the load cycles. A simple measure of the load D (duty) can be described by

$$(1) \quad D = \sum_i S_i^k$$

where S_i denotes the load cycles and k is a parameter of the material or of the component.

The load cycles S_i can be derived from the force signal $S(t)$ using the rainflow counting. The parameter k is determined from component tests. We refer to (1) for details on rainflow counting and the verification of the model(1).

It is the responsibility of the truck manufacturer to estimate the customer loading D such that the component can be designed to guarantee sufficient reliability and at the same time reduce costs and weight. In order to derive the customer load distribution extensive measurement campaigns need to be performed to cover the manifold factors influencing the load.

The chosen example is simple with respect to the mechanical load path. For example at the cabin or the frame, there are more forces acting on the component, such that the load as a whole is harder to describe in a statistical setting. In these cases more sophisticated multi-axial methods need to be applied, which are not subject of this paper. Here we stick to definition (1), which enables us to derive a scalar value to each measurement and apply univariate statistical methods.

In practice a measurement includes a lot of different quantities (channels) in parallel (accelerations, strains, forces, spring displacements ...). Formula (1) is applied to most of them even if there is no direct relation to the fatigue of a certain component as is the case for the tank mount example. Nevertheless, the duty value gives a condensed measure of the loading and can be used for the statistical analysis.

The concept of the duty D can be combined with the strength C (capacity), which is defined by

$$(2) \quad N = \frac{C}{D} \quad , \quad D = \sum_i S_i^k$$

where N is the number of repetitions of load D until failure. By definition, each component test until failure gives an observation of the capacity C as can be seen from

$N = 1 \Rightarrow C = D = \sum_i S_i^k$. From several observations of duty and capacity, we can estimate

distributions for both quantities and use these to calculate the probability of failure under

customer loading given by $P(\text{failure}) = P(C < D)$, where the failure distribution function can be derived from the distributions of duty and capacity (see (4) for more details).

In this paper the emphasis is on the distribution of duty, which describes the customer loading variation, and we concentrate on a) modelling the influence quantities including their distribution (section 3), b) deriving the distribution of subpopulations (section 4), and c) combining the partial distributions to a customer load distribution (section 4). Basics about distributions, the estimation of parameters, failure probabilities etc. can be found for example in (2) or (3). Section 5 contains a brief introduction to the process of mapping the Reference-Customer-Spectrum to the proving ground and section 6 summarizes the most important topics.

3 MODELING INFLUENCE QUANTITIES (FACTORS)

In order to determine the customer duty distribution, measurements under typical customer conditions need to be performed. Suitable vehicles are equipped for a measurement campaign and tours on public roads in different regions under realistic payload conditions, driving behaviour etc. are performed. Each channel of each measurement can be evaluated using formula(1) to get observations of the duty D of the corresponding spots in the truck.

Factors, levels, and cells

Such a campaign is an expensive project and requires a large effort during the planning phase. The first task is to list all the variables (factors), which need to be varied during the measurement to analyse their effect on the duty. These are for example

- Road type (city, highway, ...)
- Topography (flat, hill, ...)
- Payload (empty, full, ...)
- Trailer (box, flatbed, ...)
- Driving behaviour (aggressive, gentle, ...)
- Environmental conditions (icy, wet, hot, ...)
- Regional restrictions (speed limit)

As indicated, each of these factors has a certain set of possible levels, which can be two, three or more discrete levels (highway, country road, or city for the road type) or a range of continuous values (from 0% to 100% for the payload). For practical reasons, the continuous factors usually are divided into a (small) number of levels, for instance the payload levels might be 0%, 60%, and 100%. If there are n_f factors with $l_i, i = 1, \dots, n_f$ levels, then the scheme ends up in a matrix of $L = l_1 \cdot l_2 \cdot \dots \cdot l_{n_f}$ possible combinations or cells. Of course, there might be restrictions regarding the combination of different factors at certain levels (for example aggressive driving behaviour on icy road) either because they are not allowed or of minor importance. This leads to a reduction of the number of cells to be investigated. A simple example of a possible structure of factors, levels, and cells is shown in Table 1.

Contribution in %		Trailer type			
		flatbed		box	
		Payload		Payload	
		60%	100%	60%	100%
Road type	Highway	6	14	8	18
	Countryside	3	7	5	12
	City	3	7	5	12

Table 1: A 3-factor model with $3 \times 2 \times 2 = 12$ cells

If we look at a specific spot of the truck i.e. a channel, not all factors have the same importance. For instance the tank mount is less influenced by the topography as the drive train. During planning of a measurement campaign this plays a minor role, since it is intended to apply the results of the campaign to the duty evaluation for many different spots of the truck. However, in the statistical evaluation of the duty value for a certain component, the number of factors and levels might be decreased such that we need fewer assumptions on the distribution of the levels and have more measurements in the remaining cells. In the example above we might neglect the factor trailer type for the drive train analysis and work with 6 instead of 12 cells.

Although we don't need specific results from the general theory of Design of Experiments the interested reader is referred to (5) for more details on factors, levels etc.

The distribution of factors

In the following, a population means a certain set of possible customers for a specific truck. In the factor/level model such a population is defined by a multivariate distribution of the factors, which defines the relative contribution of each cell to the entire life of a truck. The number of components of this random vector X is given by the number of cells L . A possible approach for the construction of such a distribution is the following.

First consider one factor only, for example the road type with its 3 levels highway, country road, and city. Let us assume that, for a given population, an estimate for the average percentage p_i as well as for the standard deviation s_i of level i is known. Then we can easily define a random variable R_i in $[0, 100\%]$ with mean p_i and standard deviation s_i (for example a Beta distribution). Combining these 3 random variables to a 3-variate variable R with the restriction that the sum over all 3 components is 100%, we get a statistical model for the road type distribution. A realization of that distribution corresponds to the road type contributions of a specific customer of that population.

Repeating this step for all factors and combining the factor distributions again with the restriction that the sum over all components is 100%, we arrive at the full distribution X of the factors. Correlations between different factors and levels have not been taken into account so far, but this can be supported during the construction of the multivariate distributions if necessary. In that way a statistical model of a certain desired population can be constructed, which can be used to simulate customers by random selection according to X . In the example of Table 1 we have a 12-dimensional distribution F_X such that one realization of X gives the cell contributions of that specific customer as shown in the table. These procedure does not assign the same contribution (the average over the entire population = the expected value of X) to a cell for all customers, but makes it possible to have a variation as is the case in reality.

Besides the factors described above, there is another set of ‘underlying’ variables like the market (Western Europe, South America ...), the mission (long haulage, distribution ...), or the customer type (haulier, building company), that in turn determine the distribution of the levels within each factor. As an example consider the market or the customer type. If we are interested in South America, we will find less highway and more country road or even unpaved sections as in Western Europe and a certain building company will more often drive on bad roads or even off-road as a haulier. During the construction of the population model X these underlying variables need to be taken into account, but here we will concentrate on the factors as described above.

4 ESTIMATING CUSTOMER DISTRIBUTIONS

Having set up the factor and level model described in section 3 each cell needs to be filled with data. All available measurements of the truck are assigned to their corresponding cells. As described above, a cell specifies the level of the most important influence quantities. However within that cell, there still is a considerable amount of variation of the duty value. There are different slopes in a hilly environment or different road qualities on the highway etc. To cover this variation, several measurements are needed. If there are too few measurements in a cell, we need to assume that the measurements we have are representative and either ignore the variation or presume a certain variation found from other cells or from experience based considerations.

How to interpret the measured data

If there are enough observations for a cell, a distribution of the duty value can be estimated. The standard procedure is to presume a distribution type (for instance Weibull or Lognormal distribution) and fit the parameters of the distribution using least squares or maximum likelihood methods. However the distribution found in that way does not necessarily represent what we want (especially if the selection of road segments have been stratified).

To explain that, assume that we only have the two factors road type (levels highway, countryside, and city) and payload (50% 100%). It is clear, that the cell (road type = highway, payload = 100%) is very important since a considerable amount of customer kilometres will belong to that cell. We assume that there are sufficiently many measured highway sections such that they cover a representative range of roads of that type. If we now calculate the 95% quantile from the estimated distribution and interpret that value as the duty of the 95% customer, then we implicitly assume, that this customer only drives the 5% hardest roads among the measurements. This interpretation of the 95% quantile is somewhat unrealistic, since the distribution we have found is a model for highway sections, not for customers.

Monte-Carlo approach

Another approach is to simulate customers by randomly drawing measurements (with replacement) from the cell until the desired number of target kilometres is reached. The number of selections λ we have to make here approximately is the target length divided by the average measurement length (typically a much smaller number than the target length), such that λ may be of the order 100 or even more. In Figure 1 both data interpretations are shown where $\lambda = 100$ has been used for illustration.

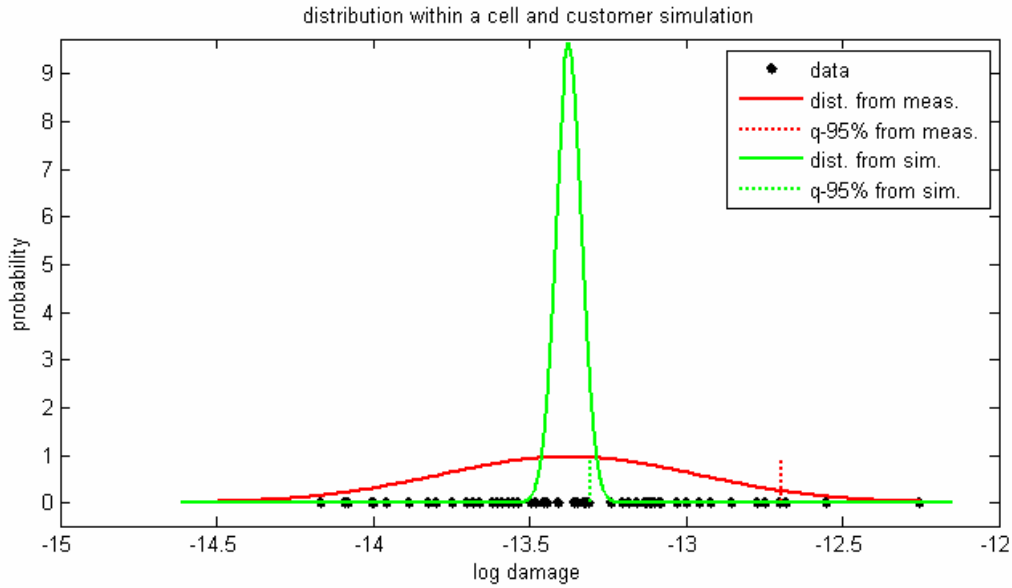


Figure 1: Distribution estimation from 73 measured duty values (black dots). The red curve is the estimated density function and the dotted red line denotes the corresponding 95% quantile. The green curve represents the density estimated from the customer simulation with $\lambda = 100$ and the dotted green line is the corresponding 95% quantile.

The difference in the 95% quantile is large (factor 4 in damage) due to the different interpretations of the data. Since both arguments sound pretty reasonable at a first glance, this simple exercise shows that care has to be taken during interpretation and analysis of the data. The simple random selection as explained above represents a customer as a certain sum of randomly selected measurements. This approach typically leads to a small variance between the simulated customers. This is a consequence of the central limit theorem and can easily be understood from the following example. Let several players throw a dice, each one $\lambda = 100$ times, and add the results. Then the possible results range from 100 to 600, but for most of the players the result will be near to the expected value 350. The variance decreases with increasing number λ .

A more realistic model is somewhere in between the two extreme ones we have shown. In principle, the idea of simulating customers by randomly selecting data out of the measured samples is a reasonable approach since it reflects the fact, that the measured samples do not describe the customer distribution but the road distribution (the distribution of the factor we consider). The selection mechanism has to be extended to take into account, that some customers will drive many different roads (this is the customer we have modelled with the simple sampling) and others will always drive the same small set of roads because of their specific mission. A possible approach is not to use a fixed value of λ for all customers, but to define a certain distribution, which models the fact that there are some ‘local’ and some ‘global’ customers. Such models introduce dependencies between the cells, since the property of being a local or a global customer depends on what measurements are assigned to him from all cells, not only within a single cell (see below for further remarks).

The random selection approach (Monte-Carlo method) as such is simple and flexible at the same time. As has been illustrated with the simple example above, the difficult task is to define and justify a good model for the customer behaviour. Applying the Monte-Carlo approach is then a rather simple step to go.

If we decided for the Monte-Carlo approach, then the distribution is not defined by a parametric formula like Weibull or Lognormal but directly by the (arbitrarily) large amount of simulated values. Of course, one may try to fit a parametric distribution to the simulation data in order to compare to former results or for purposes of further analysis. A synthetic example is shown in Figure 2. The histogram gives an idea about the shape of the distribution (symmetry or skewness etc.). In the probability plot one can easily find the quantiles by intersection of the corresponding horizontal line with the data spots. In this example the normal probability plot is used.

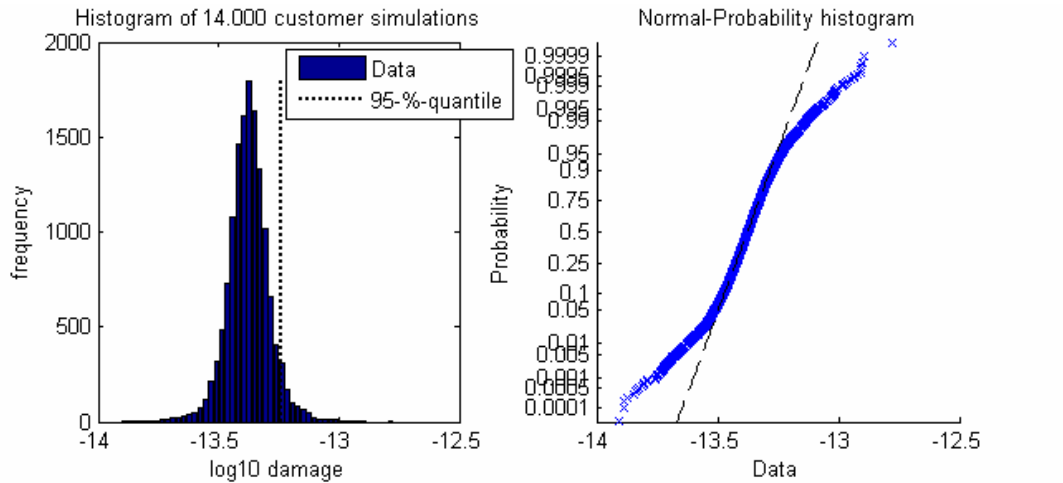


Figure 2: 14.000 simulated customers randomly selected from measurements. To the left, the histogram, to the right the values in Gauss paper are shown.

As can be easily seen, an approximation by a normal distribution would underestimate high quantiles.

Since at that stage of the process we deal only with a single cell, that is a single combination of factor levels, we don't know how large the contribution of that cell to the target mileage will be. Thus, we normalize the duty values to a certain standard length, for example 1 kilometre.

Combining the partial distributions

Once the partial distributions within the cells are known, they must be combined to get a distribution of the population covering all factor levels.

If the Monte-Carlo approach within the cells as sketched above has been taken, we have sub-populations for all cells and can combine these to get the entire population. In order to do this, we randomly select the contributions (weights) for all cells from the factor distribution X , select one of the customers in each cell and scale the normalized duty values according to the weights. However, as has been mentioned above, the idea of having local and global customers makes it hard to perform the customer simulation in each cell independently. Instead, the Monte-Carlo selection mechanism has to be applied to all cells in parallel in order to take the dependencies into account.

If there is a parametric distribution estimation $f_i(x)$, $i = 1, \dots, L$ for each cell, where f_i denotes the density of cell i , we can combine them in the form $f(x) = \sum_{i=1}^L w_i \cdot f_i(x)$, where

$w_i = E(X_i)$ is the expected value of the factor distribution, that is the average contribution of cell i to the desired target length.

In both cases, the most important result will be the 95% customer extracted from the combined distribution.

Further remarks

The advantages of the Monte-Carlo approach are its flexibility with respect to special restrictions or constraints, the lack of assumptions regarding the distribution type, and maybe most important, the fact, that the 95% customer is explicitly given as a certain combination of measurements.

Another property of the Monte-Carlo method is that it delivers a 95% customer specific to the channel (quantile channel) we have used during the distribution estimation. However, since the number of customers in the Monte-Carlo method is arbitrarily large, we should and can make sure that there are many different customers near to the 95% value, such that we even have the possibility to use this freedom for additional purposes (for example controlling spectral properties of the selected measurements). Here, the most interesting thing is to maximize the duty value of the other channels such that the customer is (at least approximately) a 95% customer for several channels.

A disadvantage of the Monte-Carlo method is that it cannot extrapolate to more extreme events than measured, whereas the approach using parametric distributions can. If this is desired, the measured data has to be enlarged by suitably generated synthetic data (extrapolation techniques, see (7) for more details) prior to the Monte-Carlo process.

5 THE CORRELATION BETWEEN TEST TRACK AND CUSTOMER LOADING

Once the Reference-Customer-Spectrum has been derived from the customer loading measurements using the methods described above, the next task is to map this to the test track. We assume that a target damage value for each channel has been derived. For simplicity of notation, we denote that vector of target values by $d^{(T)}$. Measuring a lane of the test track, Rainflow counting the signals and damage calculation leads to the corresponding vector of values for that lane, say $d^{(i)}$. Repeating this step for all lanes and all different driving conditions (several speeds or payloads) we get a large number of damage vectors $d^{(1)}, \dots, d^{(m)}$, where m is the number of different combinations of lanes and driving conditions. The task of finding a driving scenario which best meets the target values is then to find repetition factors w_1, \dots, w_m such that the differences $d^{(T)} - (w_1 \cdot d^{(1)} + \dots + w_m \cdot d^{(m)})$ are small.

This is a standard mathematical optimization problem, which can be solved by corresponding well known algorithms. A lot of refinements and extensions of the method can be introduced. For example we can pay specific attention to the shape of the load spectra for the channels by using not only a single damage value for each channel, but several values corresponding to small, medium, and large cycles for instance. Additionally, constraints on the repetition factors can be taken into account. Examples are lower or upper bounds on the repetition factors, a bound on the total mileage, or a bound on the duration of the scenario.

Depending on the ‘richness’ of the proving ground, a driving schedule satisfying some, most, or all of the channels can be derived in that way. If we only have straight lanes, then we can hardly expect to match the lateral customer forces. If no braking is foreseen on the proving ground, then we probably will miss high amplitudes in the longitudinal forces. In any case, a compromise between the accuracy of different channels and a compromise between the overall accuracy of damage values on one side and duration, mileage or simplicity of the calculated schedule on the other side has to be made. Here, engineering judgement plays an important role. The load defined by the optimized schedule is called the Target-Load-Spectrum and is used for accelerated testing as explained in the introduction.

Details of that approach can not be given here. Instead, we refer to (6), where the method is described and some applications are shown.

6 SUMMARY

The process of verification of a truck or a component for a final release essentially comprises 3 steps, namely the determination of the duty distribution, the strength distribution and the synthesis of both giving the failure probability. This paper mainly deals with the derivation of the duty distribution. The other two steps are mentioned only briefly in section 2.

The duty depends on many different influence quantities (road, payload, driving behaviour) whose distributions need to be estimated, for example from sales information or questionnaires. This cannot be derived from the mechanical system as such. Instead a model using factors and levels need to be set up, which should be as simple as possible but needs to cover all important effects.

Next, the distributions for specific level combinations (cells) are estimated using either a parametric distribution approach or a Monte-Carlo method. It turns out, that this heavily relies on the correct interpretation of the measured data. In a synthesis step, the factor distributions and the partial cell distributions are combined to get a duty value distribution covering the entire customer population and the Reference-Customer-Spectrum is derived from that.

For the verification in practice it is important to map the Reference-Customer-Spectrum to the Target-Load-Spectrum. This is a driving schedule on the test track, which comes as close as possible to the Reference-Customer-Spectrum and enables accelerated testing. The methods for deriving such target loads are based on mathematical optimization and mentioned here only briefly.

REFERENCES

- (1) E. Haibach. *Betriebsfestigkeit*. 2. Auflage, Springer Verlag, Berlin (2002)
- (2) J. Hartung, *Statistik*, R. Oldenbourg Verlag München Wien (2002)
- (3) D. C. Montgomery, G.C. Runger, *Applied Statistics and Probability for Engineers*, John Wiley & Sons (2003)
- (4) M. Karlsson, B. Johannesson, J. de Maré, T. Svensson. *Verification of safety critical components*. VDI Berichte 1876, 215-229
- (5) D. C. Montgomery. *Design and Analysis of Experiments*. John Wiley & Sons (2001).

- (6) B. Gründer, M. Speckert, M. Pompetzki. *Design of Durability Sequences Based on Rainflow Matrix Optimization*. SAE 980690, Detroit, February 1998
- (7) K. Dreßler, B. Gründer, M. Pompetzki, M. Speckert. *Statistical Load Data Analysis for Customer Correlation*, SAE, Detroit, March 2000

Published reports of the Fraunhofer ITWM

The PDF-files of the following reports are available under:

www.itwm.fraunhofer.de/de/zentral__berichte/berichte

1. D. Hietel, K. Steiner, J. Struckmeier
A Finite - Volume Particle Method for Compressible Flows
(19 pages, 1998)
2. M. Feldmann, S. Seibold
Damage Diagnosis of Rotors: Application of Hilbert Transform and Multi-Hypothesis Testing
Keywords: Hilbert transform, damage diagnosis, Kalman filtering, non-linear dynamics
(23 pages, 1998)
3. Y. Ben-Haim, S. Seibold
Robust Reliability of Diagnostic Multi-Hypothesis Algorithms: Application to Rotating Machinery
Keywords: Robust reliability, convex models, Kalman filtering, multi-hypothesis diagnosis, rotating machinery, crack diagnosis
(24 pages, 1998)
4. F.-Th. Lentjes, N. Siedow
Three-dimensional Radiative Heat Transfer in Glass Cooling Processes
(23 pages, 1998)
5. A. Klar, R. Wegener
A hierarchy of models for multilane vehicular traffic
Part I: Modeling
(23 pages, 1998)

Part II: Numerical and stochastic investigations
(17 pages, 1998)
6. A. Klar, N. Siedow
Boundary Layers and Domain Decomposition for Radiative Heat Transfer and Diffusion Equations: Applications to Glass Manufacturing Processes
(24 pages, 1998)
7. I. Choquet
Heterogeneous catalysis modelling and numerical simulation in rarified gas flows
Part I: Coverage locally at equilibrium
(24 pages, 1998)
8. J. Ohser, B. Steinbach, C. Lang
Efficient Texture Analysis of Binary Images
(17 pages, 1998)
9. J. Orlik
Homogenization for viscoelasticity of the integral type with aging and shrinkage
(20 pages, 1998)
10. J. Mohring
Helmholtz Resonators with Large Aperture
(21 pages, 1998)
11. H. W. Hamacher, A. Schöbel
On Center Cycles in Grid Graphs
(15 pages, 1998)

12. H. W. Hamacher, K.-H. Küfer
Inverse radiation therapy planning - a multiple objective optimisation approach
(14 pages, 1999)
13. C. Lang, J. Ohser, R. Hilfer
On the Analysis of Spatial Binary Images
(20 pages, 1999)
14. M. Junk
On the Construction of Discrete Equilibrium Distributions for Kinetic Schemes
(24 pages, 1999)
15. M. Junk, S. V. Raghurame Rao
A new discrete velocity method for Navier-Stokes equations
(20 pages, 1999)
16. H. Neunzert
Mathematics as a Key to Key Technologies
(39 pages (4 PDF-Files), 1999)
17. J. Ohser, K. Sandau
Considerations about the Estimation of the Size Distribution in Wicksell's Corpuscle Problem
(18 pages, 1999)
18. E. Carrizosa, H. W. Hamacher, R. Klein, S. Nickel
Solving nonconvex planar location problems by finite dominating sets
Keywords: Continuous Location, Polyhedral Gauges, Finite Dominating Sets, Approximation, Sandwich Algorithm, Greedy Algorithm
(19 pages, 2000)
19. A. Becker
A Review on Image Distortion Measures
Keywords: Distortion measure, human visual system
(26 pages, 2000)
20. H. W. Hamacher, M. Labbé, S. Nickel, T. Sonneborn
Polyhedral Properties of the Uncapacitated Multiple Allocation Hub Location Problem
Keywords: integer programming, hub location, facility location, valid inequalities, facets, branch and cut
(21 pages, 2000)
21. H. W. Hamacher, A. Schöbel
Design of Zone Tariff Systems in Public Transportation
(30 pages, 2001)
22. D. Hietel, M. Junk, R. Keck, D. Teleaga
The Finite-Volume-Particle Method for Conservation Laws
(16 pages, 2001)
23. T. Bender, H. Hennes, J. Kalcsics, M. T. Melo, S. Nickel
Location Software and Interface with GIS and Supply Chain Management
Keywords: facility location, software development, geographical information systems, supply chain management
(48 pages, 2001)
24. H. W. Hamacher, S. A. Tjandra
Mathematical Modelling of Evacuation Problems: A State of Art
(44 pages, 2001)

25. J. Kuhnert, S. Tiwari
Grid free method for solving the Poisson equation
Keywords: Poisson equation, Least squares method, Grid free method
(19 pages, 2001)
26. T. Götz, H. Rave, D. Reinelt-Bitzer, K. Steiner, H. Tiemeier
Simulation of the fiber spinning process
Keywords: Melt spinning, fiber model, Lattice Boltzmann, CFD
(19 pages, 2001)
27. A. Zemitis
On interaction of a liquid film with an obstacle
Keywords: impinging jets, liquid film, models, numerical solution, shape
(22 pages, 2001)
28. I. Ginzburg, K. Steiner
Free surface lattice-Boltzmann method to model the filling of expanding cavities by Bingham Fluids
Keywords: Generalized LBE, free-surface phenomena, interface boundary conditions, filling processes, Bingham viscoplastic model, regularized models
(22 pages, 2001)
29. H. Neunzert
»Denn nichts ist für den Menschen als Menschen etwas wert, was er nicht mit Leidenschaft tun kann«
Vortrag anlässlich der Verleihung des Akademiestipendiums des Landes Rheinland-Pfalz am 21.11.2001
Keywords: Lehre, Forschung, angewandte Mathematik, Mehrskalalanalyse, Strömungsmechanik
(18 pages, 2001)
30. J. Kuhnert, S. Tiwari
Finite pointset method based on the projection method for simulations of the incompressible Navier-Stokes equations
Keywords: Incompressible Navier-Stokes equations, Meshfree method, Projection method, Particle scheme, Least squares approximation
AMS subject classification: 76D05, 76M28
(25 pages, 2001)
31. R. Korn, M. Krekel
Optimal Portfolios with Fixed Consumption or Income Streams
Keywords: Portfolio optimisation, stochastic control, HJB equation, discretisation of control problems
(23 pages, 2002)
32. M. Krekel
Optimal portfolios with a loan dependent credit spread
Keywords: Portfolio optimisation, stochastic control, HJB equation, credit spread, log utility, power utility, non-linear wealth dynamics
(25 pages, 2002)
33. J. Ohser, W. Nagel, K. Schladtitz
The Euler number of discretized sets – on the choice of adjacency in homogeneous lattices
Keywords: image analysis, Euler number, neighborhood relationships, cuboidal lattice
(32 pages, 2002)
34. I. Ginzburg, K. Steiner
Lattice Boltzmann Model for Free-Surface flow and Its Application to Filling Process in Casting

Keywords: Lattice Boltzmann models; free-surface phenomena; interface boundary conditions; filling processes; injection molding; volume of fluid method; interface boundary conditions; advection-schemes; up-wind-schemes
(54 pages, 2002)

35. M. Günther, A. Klar, T. Materne, R. Wegener

Multivalued fundamental diagrams and stop and go waves for continuum traffic equations
Keywords: traffic flow, macroscopic equations, kinetic derivation, multivalued fundamental diagram, stop and go waves, phase transitions
(25 pages, 2002)

36. S. Feldmann, P. Lang, D. Prätzel-Wolters
Parameter influence on the zeros of network determinants

Keywords: Networks, Equicofactor matrix polynomials, Realization theory, Matrix perturbation theory
(30 pages, 2002)

37. K. Koch, J. Ohser, K. Schladitz

Spectral theory for random closed sets and estimating the covariance via frequency space
Keywords: Random set, Bartlett spectrum, fast Fourier transform, power spectrum
(28 pages, 2002)

38. D. d'Humières, I. Ginzburg

Multi-reflection boundary conditions for lattice Boltzmann models
Keywords: lattice Boltzmann equation, boundary conditions, bounce-back rule, Navier-Stokes equation
(72 pages, 2002)

39. R. Korn

Elementare Finanzmathematik
Keywords: Finanzmathematik, Aktien, Optionen, Portfolio-Optimierung, Börse, Lehrerweiterbildung, Mathematikunterricht
(98 pages, 2002)

40. J. Kallrath, M. C. Müller, S. Nickel

Batch Presorting Problems: Models and Complexity Results
Keywords: Complexity theory, Integer programming, Assignment, Logistics
(19 pages, 2002)

41. J. Linn

On the frame-invariant description of the phase space of the Folgar-Tucker equation
Key words: fiber orientation, Folgar-Tucker equation, injection molding
(5 pages, 2003)

42. T. Hanne, S. Nickel

A Multi-Objective Evolutionary Algorithm for Scheduling and Inspection Planning in Software Development Projects
Key words: multiple objective programming, project management and scheduling, software development, evolutionary algorithms, efficient set
(29 pages, 2003)

43. T. Bortfeld, K.-H. Küfer, M. Monz, A. Scherrer, C. Thieke, H. Trinkaus

Intensity-Modulated Radiotherapy - A Large Scale Multi-Criteria Programming Problem
Keywords: multiple criteria optimization, representative systems of Pareto solutions, adaptive triangulation, clustering and disaggregation techniques, visualization of Pareto solutions, medical physics, external beam radiotherapy planning, intensity modulated radiotherapy
(31 pages, 2003)

44. T. Halfmann, T. Wichmann

Overview of Symbolic Methods in Industrial Analog Circuit Design
Keywords: CAD, automated analog circuit design, symbolic analysis, computer algebra, behavioral modeling, system simulation, circuit sizing, macro modeling, differential-algebraic equations, index
(17 pages, 2003)

45. S. E. Mikhailov, J. Orlik

Asymptotic Homogenisation in Strength and Fatigue Durability Analysis of Composites
Keywords: multiscale structures, asymptotic homogenization, strength, fatigue, singularity, non-local conditions
(14 pages, 2003)

46. P. Domínguez-Marín, P. Hansen, N. Mladenović, S. Nickel

Heuristic Procedures for Solving the Discrete Ordered Median Problem
Keywords: genetic algorithms, variable neighborhood search, discrete facility location
(31 pages, 2003)

47. N. Boland, P. Domínguez-Marín, S. Nickel, J. Puerto

Exact Procedures for Solving the Discrete Ordered Median Problem
Keywords: discrete location, Integer programming
(41 pages, 2003)

48. S. Feldmann, P. Lang

Padé-like reduction of stable discrete linear systems preserving their stability
Keywords: Discrete linear systems, model reduction, stability, Hankel matrix, Stein equation
(16 pages, 2003)

49. J. Kallrath, S. Nickel

A Polynomial Case of the Batch Presorting Problem
Keywords: batch presorting problem, online optimization, competitive analysis, polynomial algorithms, logistics
(17 pages, 2003)

50. T. Hanne, H. L. Trinkaus

knowCube for MCDM – Visual and Interactive Support for Multicriteria Decision Making
Key words: Multicriteria decision making, knowledge management, decision support systems, visual interfaces, interactive navigation, real-life applications.
(26 pages, 2003)

51. O. Iliev, V. Laptev

On Numerical Simulation of Flow Through Oil Filters
Keywords: oil filters, coupled flow in plain and porous media, Navier-Stokes, Brinkman, numerical simulation
(8 pages, 2003)

52. W. Dörfler, O. Iliev, D. Stoyanov, D. Vassileva
On a Multigrid Adaptive Refinement Solver for Saturated Non-Newtonian Flow in Porous Media

Keywords: Nonlinear multigrid, adaptive refinement, non-Newtonian flow in porous media
(17 pages, 2003)

53. S. Kruse

On the Pricing of Forward Starting Options under Stochastic Volatility
Keywords: Option pricing, forward starting options, Heston model, stochastic volatility, cliquet options
(11 pages, 2003)

54. O. Iliev, D. Stoyanov

Multigrid – adaptive local refinement solver for incompressible flows
Keywords: Navier-Stokes equations, incompressible flow, projection-type splitting, SIMPLE, multigrid methods, adaptive local refinement, lid-driven flow in a cavity
(37 pages, 2003)

55. V. Starikovicius

The multiphase flow and heat transfer in porous media
Keywords: Two-phase flow in porous media, various formulations, global pressure, multiphase mixture model, numerical simulation
(30 pages, 2003)

56. P. Lang, A. Sarishvili, A. Wirsén

Blocked neural networks for knowledge extraction in the software development process
Keywords: Blocked Neural Networks, Nonlinear Regression, Knowledge Extraction, Code Inspection
(21 pages, 2003)

57. H. Knaf, P. Lang, S. Zeiser

Diagnosis aiding in Regulation Thermography using Fuzzy Logic
Keywords: fuzzy logic, knowledge representation, expert system
(22 pages, 2003)

58. M. T. Melo, S. Nickel, F. Saldanha da Gama

Largescale models for dynamic multi-commodity capacitated facility location
Keywords: supply chain management, strategic planning, dynamic location, modeling
(40 pages, 2003)

59. J. Orlik

Homogenization for contact problems with periodically rough surfaces
Keywords: asymptotic homogenization, contact problems
(28 pages, 2004)

60. A. Scherrer, K.-H. Küfer, M. Monz, F. Alonso, T. Bortfeld

IMRT planning on adaptive volume structures – a significant advance of computational complexity
Keywords: Intensity-modulated radiation therapy (IMRT), inverse treatment planning, adaptive volume structures, hierarchical clustering, local refinement, adaptive clustering, convex programming, mesh generation, multi-grid methods
(24 pages, 2004)

61. D. Kehrwald

Parallel lattice Boltzmann simulation of complex flows
Keywords: Lattice Boltzmann methods, parallel computing, microstructure simulation, virtual material design, pseudo-plastic fluids, liquid composite moulding
(12 pages, 2004)

62. O. Iliev, J. Linn, M. Moog, D. Niedziela, V. Starikovicius

On the Performance of Certain Iterative Solvers for Coupled Systems Arising in Discretization of Non-Newtonian Flow Equations
Keywords: Performance of iterative solvers, Preconditioners, Non-Newtonian flow
(17 pages, 2004)

63. R. Ciegis, O. Iliev, S. Rief, K. Steiner

On Modelling and Simulation of Different Regimes for Liquid Polymer Moulding

Keywords: Liquid Polymer Moulding, Modelling, Simulation, Infiltration, Front Propagation, non-Newtonian flow in porous media
(43 pages, 2004)

64. T. Hanne, H. Neu
Simulating Human Resources in Software Development Processes
Keywords: Human resource modeling, software process, productivity, human factors, learning curve
(14 pages, 2004)

65. O. Iliev, A. Mikelic, P. Popov
Fluid structure interaction problems in deformable porous media: Toward permeability of deformable porous media
Keywords: fluid-structure interaction, deformable porous media, upscaling, linear elasticity, stokes, finite elements
(28 pages, 2004)

66. F. Gaspar, O. Iliev, F. Lisbona, A. Naumovich, P. Vabishchevich
On numerical solution of 1-D poroelasticity equations in a multilayered domain
Keywords: poroelasticity, multilayered material, finite volume discretization, MAC type grid
(41 pages, 2004)

67. J. Ohser, K. Schladitz, K. Koch, M. Nöthe
Diffraction by image processing and its application in materials science
Keywords: porous microstructure, image analysis, random set, fast Fourier transform, power spectrum, Bartlett spectrum
(13 pages, 2004)

68. H. Neunzert
Mathematics as a Technology: Challenges for the next 10 Years
Keywords: applied mathematics, technology, modelling, simulation, visualization, optimization, glass processing, spinning processes, fiber-fluid interaction, turbulence effects, topological optimization, multicriteria optimization, Uncertainty and Risk, financial mathematics, Malliavin calculus, Monte-Carlo methods, virtual material design, filtration, bio-informatics, system biology
(29 pages, 2004)

69. R. Ewing, O. Iliev, R. Lazarov, A. Naumovich
On convergence of certain finite difference discretizations for 1D poroelasticity interface problems
Keywords: poroelasticity, multilayered material, finite volume discretizations, MAC type grid, error estimates
(26 pages, 2004)

70. W. Dörfler, O. Iliev, D. Stoyanov, D. Vassileva
On Efficient Simulation of Non-Newtonian Flow in Saturated Porous Media with a Multigrid Adaptive Refinement Solver
Keywords: Nonlinear multigrid, adaptive refinement, non-Newtonian in porous media
(25 pages, 2004)

71. J. Kalcsics, S. Nickel, M. Schröder
Towards a Unified Territory Design Approach – Applications, Algorithms and GIS Integration
Keywords: territory design, political districting, sales territory alignment, optimization algorithms, Geographical Information Systems
(40 pages, 2005)

72. K. Schladitz, S. Peters, D. Reinelt-Bitzer, A. Wiegmann, J. Ohser
Design of acoustic trim based on geometric modeling and flow simulation for non-woven

Keywords: random system of fibers, Poisson line process, flow resistivity, acoustic absorption, Lattice-Boltzmann method, non-woven
(21 pages, 2005)

73. V. Rutka, A. Wiegmann
Explicit Jump Immersed Interface Method for virtual material design of the effective elastic moduli of composite materials
Keywords: virtual material design, explicit jump immersed interface method, effective elastic moduli, composite materials
(22 pages, 2005)

74. T. Hanne
Eine Übersicht zum Scheduling von Baustellen
Keywords: Projektplanung, Scheduling, Bauplanung, Bauindustrie
(32 pages, 2005)

75. J. Linn
The Folgar-Tucker Model as a Differential Algebraic System for Fiber Orientation Calculation
Keywords: fiber orientation, Folgar-Tucker model, invariants, algebraic constraints, phase space, trace stability
(15 pages, 2005)

76. M. Speckert, K. Dreßler, H. Mauch, A. Lion, G. J. Wierda
Simulation eines neuartigen Prüfsystems für Achserproben durch MKS-Modellierung einschließlich Regelung
Keywords: virtual test rig, suspension testing, multibody simulation, modeling hexapod test rig, optimization of test rig configuration
(20 pages, 2005)

77. K.-H. Küfer, M. Monz, A. Scherrer, P. Süß, F. Alonso, A. S. A. Sultan, Th. Bortfeld, D. Craft, Chr. Thieke
Multicriteria optimization in intensity modulated radiotherapy planning
Keywords: multicriteria optimization, extreme solutions, real-time decision making, adaptive approximation schemes, clustering methods, IMRT planning, reverse engineering
(51 pages, 2005)

78. S. Amstutz, H. Andrä
A new algorithm for topology optimization using a level-set method
Keywords: shape optimization, topology optimization, topological sensitivity, level-set
(22 pages, 2005)

79. N. Ettrich
Generation of surface elevation models for urban drainage simulation
Keywords: Flooding, simulation, urban elevation models, laser scanning
(22 pages, 2005)

80. H. Andrä, J. Linn, I. Matei, I. Shklyar, K. Steiner, E. Teichmann
OPTCAST – Entwicklung adäquater Strukturoptimierungsverfahren für Gießereien Technischer Bericht (KURZFASSUNG)
Keywords: Topologieoptimierung, Level-Set-Methode, Gießprozesssimulation, Gießtechnische Restriktionen, CAE-Kette zur Strukturoptimierung
(77 pages, 2005)

81. N. Marheineke, R. Wegener
Fiber Dynamics in Turbulent Flows Part I: General Modeling Framework

Keywords: fiber-fluid interaction; Cosserat rod; turbulence modeling; Kolmogorov's energy spectrum; double-velocity correlations; differentiable Gaussian fields
(20 pages, 2005)

Part II: Specific Taylor Drag
Keywords: flexible fibers; $k-\varepsilon$ turbulence model; fiber-turbulence interaction scales; air drag; random Gaussian aerodynamic force; white noise; stochastic differential equations; ARMA process
(18 pages, 2005)

82. C. H. Lampert, O. Wirjadi
An Optimal Non-Orthogonal Separation of the Anisotropic Gaussian Convolution Filter
Keywords: Anisotropic Gaussian filter, linear filtering, orientation space, nD image processing, separable filters
(25 pages, 2005)

83. H. Andrä, D. Stoyanov
Error indicators in the parallel finite element solver for linear elasticity DDFEM
Keywords: linear elasticity, finite element method, hierarchical shape functions, domain decomposition, parallel implementation, a posteriori error estimates
(21 pages, 2006)

84. M. Schröder, I. Solchenbach
Optimization of Transfer Quality in Regional Public Transit
Keywords: public transit, transfer quality, quadratic assignment problem
(16 pages, 2006)

85. A. Naumovich, F. J. Gaspar
On a multigrid solver for the three-dimensional Biot poroelasticity system in multilayered domains
Keywords: poroelasticity, interface problem, multigrid, operator-dependent prolongation
(11 pages, 2006)

86. S. Panda, R. Wegener, N. Marheineke
Slender Body Theory for the Dynamics of Curved Viscous Fibers
Keywords: curved viscous fibers; fluid dynamics; Navier-Stokes equations; free boundary value problem; asymptotic expansions; slender body theory
(14 pages, 2006)

87. E. Ivanov, H. Andrä, A. Kudryavtsev
Domain Decomposition Approach for Automatic Parallel Generation of Tetrahedral Grids
Key words: Grid Generation, Unstructured Grid, Delaunay Triangulation, Parallel Programming, Domain Decomposition, Load Balancing
(18 pages, 2006)

88. S. Tiwari, S. Antonov, D. Hietel, J. Kuhnert, R. Wegener
A Meshfree Method for Simulations of Interactions between Fluids and Flexible Structures
Key words: Meshfree Method, FPM, Fluid Structure Interaction, Sheet of Paper, Dynamical Coupling
(16 pages, 2006)

89. R. Ciegis, O. Iliev, V. Starikovicius, K. Steiner
Numerical Algorithms for Solving Problems of Multiphase Flows in Porous Media
Keywords: nonlinear algorithms, finite-volume method, software tools, porous media, flows
(16 pages, 2006)

90. D. Niedziela, O. Iliev, A. Latz
On 3D Numerical Simulations of Viscoelastic Fluids

Keywords: non-Newtonian fluids, anisotropic viscosity, integral constitutive equation
(18 pages, 2006)

91. A. Winterfeld

Application of general semi-infinite Programming to Lapidary Cutting Problems

Keywords: large scale optimization, nonlinear programming, general semi-infinite optimization, design centering, clustering
(26 pages, 2006)

92. J. Orlik, A. Ostrovska

Space-Time Finite Element Approximation and Numerical Solution of Hereditary Linear Viscoelasticity Problems

Keywords: hereditary viscoelasticity; kern approximation by interpolation; space-time finite element approximation, stability and a priori estimate
(24 pages, 2006)

93. V. Rutka, A. Wiegmann, H. Andrä

EJIM for Calculation of effective Elastic Moduli in 3D Linear Elasticity

Keywords: Elliptic PDE, linear elasticity, irregular domain, finite differences, fast solvers, effective elastic moduli
(24 pages, 2006)

94. A. Wiegmann, A. Zemitis

EJ-HEAT: A Fast Explicit Jump Harmonic Averaging Solver for the Effective Heat Conductivity of Composite Materials

Keywords: Stationary heat equation, effective thermal conductivity, explicit jump, discontinuous coefficients, virtual material design, microstructure simulation, EJ-HEAT
(21 pages, 2006)

95. A. Naumovich

On a finite volume discretization of the three-dimensional Biot poroelasticity system in multilayered domains

Keywords: Biot poroelasticity system, interface problems, finite volume discretization, finite difference method
(21 pages, 2006)

96. M. Krekel, J. Wenzel

A unified approach to Credit Default Swap-tion and Constant Maturity Credit Default Swap valuation

Keywords: LIBOR market model, credit risk, Credit Default Swaption, Constant Maturity Credit Default Swap-method
(43 pages, 2006)

97. A. Dreyer

Interval Methods for Analog Circuits

Keywords: interval arithmetic, analog circuits, tolerance analysis, parametric linear systems, frequency response, symbolic analysis, CAD, computer algebra
(36 pages, 2006)

98. N. Weigel, S. Weihe, G. Bitsch, K. Dreßler
Usage of Simulation for Design and Optimization of Testing

Keywords: Vehicle test rigs, MBS, control, hydraulics, testing philosophy
(14 pages, 2006)

99. H. Lang, G. Bitsch, K. Dreßler, M. Speckert
Comparison of the solutions of the elastic and elastoplastic boundary value problems

Keywords: Elastic BVP, elastoplastic BVP, variational inequalities, rate-independency, hysteresis, linear kinematic hardening, stop- and play-operator
(21 pages, 2006)

100. M. Speckert, K. Dreßler, H. Mauch

MBS Simulation of a hexapod based suspension test rig

Keywords: Test rig, MBS simulation, suspension, hydraulics, controlling, design optimization
(12 pages, 2006)

101. S. Azizi Sultan, K.-H. Küfer

A dynamic algorithm for beam orientations in multicriteria IMRT planning

Keywords: radiotherapy planning, beam orientation optimization, dynamic approach, evolutionary algorithm, global optimization
(14 pages, 2006)

102. T. Götz, A. Klar, N. Marheineke, R. Wegener

A Stochastic Model for the Fiber Lay-down Process in the Nonwoven Production

Keywords: fiber dynamics, stochastic Hamiltonian system, stochastic averaging
(17 pages, 2006)

103. Ph. Süß, K.-H. Küfer

Balancing control and simplicity: a variable aggregation method in intensity modulated radiation therapy planning

Keywords: IMRT planning, variable aggregation, clustering methods
(22 pages, 2006)

104. A. Beaudry, G. Laporte, T. Melo, S. Nickel

Dynamic transportation of patients in hospitals

Keywords: in-house hospital transportation, dial-a-ride, dynamic mode, tabu search
(37 pages, 2006)

105. Th. Hanne

Applying multiobjective evolutionary algorithms in industrial projects

Keywords: multiobjective evolutionary algorithms, discrete optimization, continuous optimization, electronic circuit design, semi-infinite programming, scheduling
(18 pages, 2006)

106. J. Franke, S. Halim

Wild bootstrap tests for comparing signals and images

Keywords: wild bootstrap test, texture classification, textile quality control, defect detection, kernel estimate, nonparametric regression
(13 pages, 2007)

107. Z. Drezner, S. Nickel

Solving the ordered one-median problem in the plane

Keywords: planar location, global optimization, ordered median, big triangle small triangle method, bounds, numerical experiments
(21 pages, 2007)

108. Th. Götz, A. Klar, A. Unterreiter, R. Wegener

Numerical evidence for the non-existing of solutions of the equations describing rotational fiber spinning

Keywords: rotational fiber spinning, viscous fibers, boundary value problem, existence of solutions
(11 pages, 2007)

109. Ph. Süß, K.-H. Küfer

Smooth intensity maps and the Bortfeld-Boyer sequencer

Keywords: probabilistic analysis, intensity modulated radiotherapy treatment (IMRT), IMRT plan application, step-and-shoot sequencing
(8 pages, 2007)

110. E. Ivanov, O. Gluchshenko, H. Andrä, A. Kudryavtsev

Parallel software tool for decomposing and meshing of 3d structures

Keywords: a-priori domain decomposition, unstructured grid, Delaunay mesh generation
(14 pages, 2007)

111. O. Iliev, R. Lazarov, J. Willems

Numerical study of two-grid preconditioners for 1d elliptic problems with highly oscillating discontinuous coefficients

Keywords: two-grid algorithm, oscillating coefficients, preconditioner
(20 pages, 2007)

112. L. Bonilla, T. Götz, A. Klar, N. Marheineke, R. Wegener

Hydrodynamic limit of the Fokker-Planck-equation describing fiber lay-down processes

Keywords: stochastic differential equations, Fokker-Planck equation, asymptotic expansion, Ornstein-Uhlenbeck process
(17 pages, 2007)

113. S. Rief

Modeling and simulation of the pressing section of a paper machine

Keywords: paper machine, computational fluid dynamics, porous media
(41 pages, 2007)

114. R. Ciegis, O. Iliev, Z. Lakdawala

On parallel numerical algorithms for simulating industrial filtration problems

Keywords: Navier-Stokes-Brinkmann equations, finite volume discretization method, SIMPLE, parallel computing, data decomposition method
(24 pages, 2007)

115. N. Marheineke, R. Wegener

Dynamics of curved viscous fibers with surface tension

Keywords: Slender body theory, curved viscous bers with surface tension, free boundary value problem
(25 pages, 2007)

116. S. Feth, J. Franke, M. Speckert

Resampling-Methoden zur mse-Korrektur und Anwendungen in der Betriebsfestigkeit

Keywords: Weibull, Bootstrap, Maximum-Likelihood, Betriebsfestigkeit
(16 pages, 2007)

117. H. Knaf

Kernel Fisher discriminant functions – a concise and rigorous introduction

Keywords: wild bootstrap test, texture classification, textile quality control, defect detection, kernel estimate, nonparametric regression
(30 pages, 2007)

118. O. Iliev, I. Rybak

On numerical upscaling for flows in heterogeneous porous media

Keywords: numerical upscaling, heterogeneous porous media, single phase flow, Darcy's law, multiscale problem, effective permeability, multipoint flux approximation, anisotropy
(17 pages, 2007)

119. O. Iliev, I. Rybak

On approximation property of multipoint flux approximation method

Keywords: Multipoint flux approximation, finite volume method, elliptic equation, discontinuous tensor coefficients, anisotropy
(15 pages, 2007)

120. O. Iliev, I. Rybak, J. Willems
On upscaling heat conductivity for a class of industrial problems

Keywords: Multiscale problems, effective heat conductivity, numerical upscaling, domain decomposition
(21 pages, 2007)

121. R. Ewing, O. Iliev, R. Lazarov, I. Rybak
On two-level preconditioners for flow in porous media

Keywords: Multiscale problem, Darcy's law, single phase flow, anisotropic heterogeneous porous media, numerical upscaling, multigrid, domain decomposition, efficient preconditioner
(18 pages, 2007)

122. M. Brickenstein, A. Dreyer
POLYBORI: A Gröbner basis framework for Boolean polynomials

Keywords: Gröbner basis, formal verification, Boolean polynomials, algebraic cryptanalysis, satisfiability
(23 pages, 2007)

123. O. Wirjadi
Survey of 3d image segmentation methods

Keywords: image processing, 3d, image segmentation, binarization
(20 pages, 2007)

124. S. Zeytun, A. Gupta
A Comparative Study of the Vasicek and the CIR Model of the Short Rate

Keywords: interest rates, Vasicek model, CIR-model, calibration, parameter estimation
(17 pages, 2007)

125. G. Hanselmann, A. Sarishvili
Heterogeneous redundancy in software quality prediction using a hybrid Bayesian approach

Keywords: reliability prediction, fault prediction, non-homogeneous poisson process, Bayesian model averaging
(17 pages, 2007)

126. V. Maag, M. Berger, A. Winterfeld, K.-H. Küfer
A novel non-linear approach to minimal area rectangular packing

Keywords: rectangular packing, non-overlapping constraints, non-linear optimization, regularization, relaxation
(18 pages, 2007)

127. M. Monz, K.-H. Küfer, T. Bortfeld, C. Thieke
Pareto navigation – systematic multi-criteria-based IMRT treatment plan determination

Keywords: convex, interactive multi-objective optimization, intensity modulated radiotherapy planning
(15 pages, 2007)

128. M. Krause, A. Scherrer
On the role of modeling parameters in IMRT plan optimization

Keywords: intensity-modulated radiotherapy (IMRT), inverse IMRT planning, convex optimization, sensitivity analysis, elasticity, modeling parameters, equivalent uniform dose (EUD)
(18 pages, 2007)

129. A. Wiegmann
Computation of the permeability of porous materials from their microstructure by FFF-Stokes

Keywords: permeability, numerical homogenization, fast Stokes solver
(24 pages, 2007)

130. T. Melo, S. Nickel, F. Saldanha da Gama
Facility Location and Supply Chain Management – A comprehensive review

Keywords: facility location, supply chain management, network design
(54 pages, 2007)

131. T. Hanne, T. Melo, S. Nickel
Bringing robustness to patient flow management through optimized patient transports in hospitals

Keywords: Dial-a-Ride problem, online problem, case study, tabu search, hospital logistics
(23 pages, 2007)

132. R. Ewing, O. Iliev, R. Lazarov, I. Rybak, J. Willems
An efficient approach for upscaling properties of composite materials with high contrast of coefficients

Keywords: effective heat conductivity, permeability of fractured porous media, numerical upscaling, fibrous insulation materials, metal foams
(16 pages, 2008)

133. S. Gelareh, S. Nickel
New approaches to hub location problems in public transport planning

Keywords: integer programming, hub location, transportation, decomposition, heuristic
(25 pages, 2008)

134. G. Thömmes, J. Becker, M. Junk, A. K. Vaikuntam, D. Kehrwald, A. Klar, K. Steiner, A. Wiegmann
A Lattice Boltzmann Method for immiscible multiphase flow simulations using the Level Set Method

Keywords: Lattice Boltzmann method, Level Set method, free surface, multiphase flow
(28 pages, 2008)

135. J. Orlik
Homogenization in elasto-plasticity

Keywords: multiscale structures, asymptotic homogenization, nonlinear energy
(40 pages, 2008)

136. J. Almquist, H. Schmidt, P. Lang, J. Deitmer, M. Jirstrand, D. Prätzel-Wolters, H. Becker
Determination of interaction between MCT1 and CAII via a mathematical and physiological approach

Keywords: mathematical modeling; model reduction; electrophysiology; pH-sensitive microelectrodes; proton antenna
(20 pages, 2008)

137. E. Savenkov, H. Andrä, O. Iliev
An analysis of one regularization approach for solution of pure Neumann problem

Keywords: pure Neumann problem, elasticity, regularization, finite element method, condition number
(27 pages, 2008)

138. O. Berman, J. Kalcsics, D. Krass, S. Nickel
The ordered gradual covering location problem on a network

Keywords: gradual covering, ordered median function, network location
(32 pages, 2008)

139. S. Gelareh, S. Nickel
Multi-period public transport design: A novel model and solution approaches

Keywords: Integer programming, hub location, public transport, multi-period planning, heuristics
(31 pages, 2008)

140. T. Melo, S. Nickel, F. Saldanha-da-Gama
Network design decisions in supply chain planning

Keywords: supply chain design, integer programming models, location models, heuristics
(20 pages, 2008)

141. C. Lautensack, A. Särkkä, J. Freitag, K. Schladitz
Anisotropy analysis of pressed point processes

Keywords: estimation of compression, isotropy test, nearest neighbour distance, orientation analysis, polar ice, Ripley's K function
(35 pages, 2008)

142. O. Iliev, R. Lazarov, J. Willems
A Graph-Laplacian approach for calculating the effective thermal conductivity of complicated fiber geometries

Keywords: graph laplacian, effective heat conductivity, numerical upscaling, fibrous materials
(14 pages, 2008)

143. J. Linn, T. Stephan, J. Carlsson, R. Bohlin
Fast simulation of quasistatic rod deformations for VR applications

Keywords: quasistatic deformations, geometrically exact rod models, variational formulation, energy minimization, finite differences, nonlinear conjugate gradients
(7 pages, 2008)

144. J. Linn, T. Stephan
Simulation of quasistatic deformations using discrete rod models

Keywords: quasistatic deformations, geometrically exact rod models, variational formulation, energy minimization, finite differences, nonlinear conjugate gradients
(9 pages, 2008)

145. J. Marburger, N. Marheineke, R. Pinnau
Adjoint based optimal control using mesh-less discretizations

Keywords: Mesh-less methods, particle methods, Eulerian-Lagrangian formulation, optimization strategies, adjoint method, hyperbolic equations
(14 pages, 2008)

146. S. Desmettre, J. Gould, A. Szimayer
Own-company stockholding and work effort preferences of an unconstrained executive

Keywords: optimal portfolio choice, executive compensation
(33 pages, 2008)

147. M. Berger, M. Schröder, K.-H. Küfer
A constraint programming approach for the two-dimensional rectangular packing problem with orthogonal orientations

Keywords: rectangular packing, orthogonal orientations non-overlapping constraints, constraint propagation
(13 pages, 2008)

148. K. Schladitz, C. Redenbach, T. Sych,
M. Godehardt

***Microstructural characterisation of open
foams using 3d images***

*Keywords: virtual material design, image analysis, open
foams*

(30 pages, 2008)

149. E. Fernández, J. Kalcsics, S. Nickel,
R. Ríos-Mercado

***A novel territory design model arising in
the implementation of the WEEE-Directive***

Keywords: heuristics, optimization, logistics, recycling

(28 pages, 2008)

150. H. Lang, J. Linn

***Lagrangian field theory in space-time for
geometrically exact Cosserat rods***

*Keywords: Cosserat rods, geometrically exact rods,
small strain, large deformation, deformable bodies,
Lagrangian field theory, variational calculus*

(19 pages, 2009)

151. K. Dreßler, M. Speckert, R. Müller,
Ch. Weber

***Customer loads correlation in truck engi-
neering***

*Keywords: Customer distribution, safety critical compo-
nents, quantile estimation, Monte-Carlo methods*

(11 pages, 2009)

Status quo: March 2009